



www.truelite.us

FREYR

SERIES-E LED STREET LIGHT

65W

Truelite FREYR series-E AC LED Streetlight luminaries are designed to replace conventional fixtures. Its compact design allows increased mounting versatility and ease of installation. The long lived LED luminaries are designed to meet the most demanding specification criteria while offering maximum energy savings, reduced maintenance costs, and a superior quality of light. Our led street light offer improved night time visibility, safety through better color rendering, more uniform lighting distributions and the elimination of many dark areas between poles. It also works with intelligent street light system. The design adheres to relevant safety and street lighting standards and the technology has attractive energy-saving capacity of up to 70% against traditional fixtures.


Features

- Wide input voltage range
- More than 70% energy savings, long life and high reliability
- Robust housing to stand harsh environments
- Die casting aluminum alloy body, electrostatic spray treatment withstand high temperature and acid, alkali resistance
- Integrated with LED module with independent control, easy maintenance
- Patens structure, 0-90° angle adjustable lighting installation
- Compatible to work with solar and wind energy for more energy saving
- Low electromagnetic emission
- Easy to mount & focus
- High Luminous Efficiency
- IP 65 rating
- Lamp holder adjustable from 0-65 degree
- Instant start , no flickering and long switching life
- CE, RoHS Certifications

Product Specification


Electrical Data	
Operating Voltage	AC 90 ~ 305 VAC
No of LEDs	36
Frequency	50/60Hz
Driver Power Efficiency	>90%
Rated power	65W
Power Factor(PF)	>0.95
Total Harmonic Distortion	< 20%
Power supply	Isolated type
Dimming	Optional
Light Data	
Color Temperature	3000K/4000K/5000K/5700K
Color Rendering Index	>70
Beam Angle	10°,25°,40°,60°,90°,120°.
Efficiency of led	104 lm/W
Luminous flux	6902lm
Led chip	Cree
Service Life	>50000 Hours
Environmental Data	
Working Ambient Temperature	-40° To +50°
IP Grade	IP 65
Relative Humidity(RH)	10%-95%
Cooling	Conventional
Certificate	UL/ CUL /DLC/ LM79 / ENEC /CB/CE/ ERP/ RoHS /PSE /IK08
Mechanical Data	
Product finish	Gray
Light Fixture Material	Aluminum
Dimension	718 x 283 x 107(mm) 28.27" X 11.14" X 4.21"
Weight	4.6kg(10.14lbs)
Luminaire Fixing	Pole mounted
*All parameters are measured @ ambient temperature Tc 25 degree	

Fixture

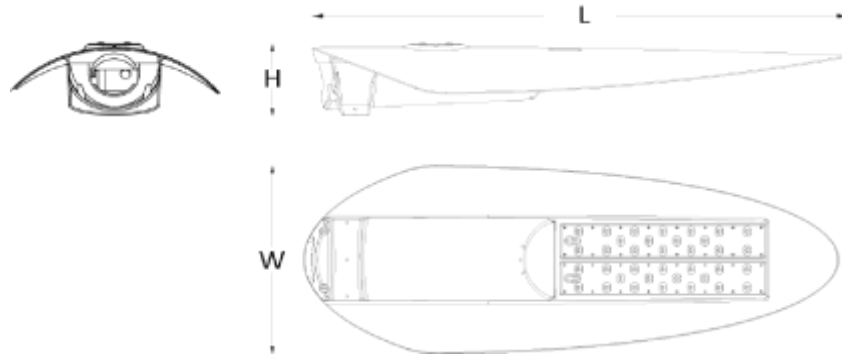

Unit: mm

Isolux Diagram

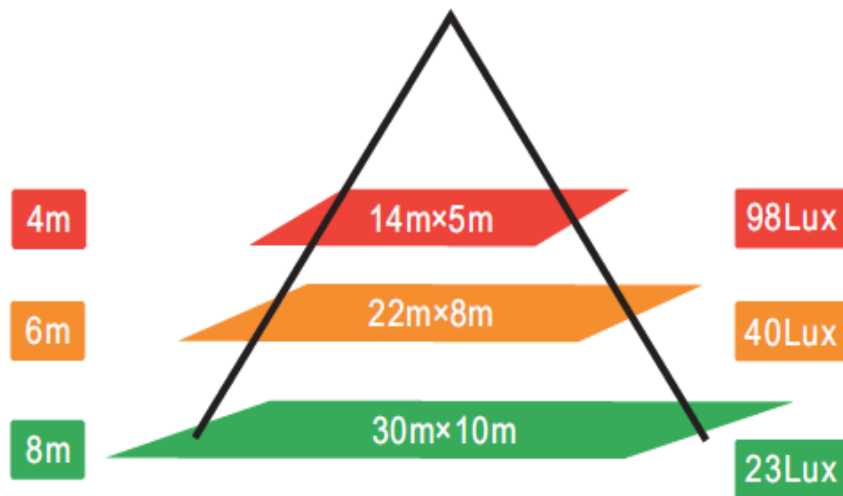

Application Area

Outdoor lighting plays a crucial role in the safety and security of our streets and public places. Today outdoor lighting has to be smarter to comply with new legislation, environmental challenges and requirements to reduce energy usage. This is where the latest outdoor, roadway and street lighting solutions from Truelite come into play. It is an Ideal for application at city branch, residential streets, courtyard, etc.

Ordering Code

Product Series	MODEL	OPTICAL LENS	CCT	OPTIONAL COLOR	LIGHTING CONTROL	ACCESSORY INFO
FREYR Series-E AC	TLSLE60	T2M	30K	GR	00	Adaptor Bracket
		Type II Medium	3045	Grey (RAL:7004)	Not required	
		T3L	± 175K			
		Type III Long	40K***			
		T5U	3985		01	3/5/7-pin NEMA Receptacle
		Average Beam angle 10°	± 275K		Photocell	
		T5V	50K***			
		Average Beam angle 25°	5028 ± 283K			
		T5W	57K		02	20KA Surge Protection Device
		Average Beam angle 40°	5665		1-10V dimming	
		T5S	± 355K			
		Average Beam angle 60°				
		T5M				
		Average Beam angle 90°				
T5L						
Average Beam angle 120°						
T5D						
Diffuser						
					Safety Cable	

Example:

TLSLE60-T1M50K-GR00, TLSLE60-T1M40K-GR02, TLSLE60-T1M50K-GR01